

## FEATURES

### **FPT N45 SM2 Engine**

FPT Industrial (a division of Case/New Holland Industrial) is a leading manufacturer of engines for industrial applications backed by an extensive service network.

### **Deep Sea 7310 MKII Controller**

Digital controller providing immediate performance information and safety shutdowns.

### **Stamford Generator End**

Alternators built to produce clean power for industrial applications.

### **Powder Coat Paint**

Incredibly durable and long lasting finish.

### **Block Heater**

In-line Kim Hotstart, 120V, block heater with thermostat.

### **Battery Charger**

Guest 5 Amp charger standard.

### **100% Load Tested**

We load test every generator before it leaves our facility.



Shown with optional enclosure and fuel tank

## OPTIONAL ACCESSORIES

### **Sub-Base Fuel Tank**

UL142 double wall steel fuel tank with stub up area allows for a clean installation with minimal footprint.

### **WEBNET**

Control your generator from your smart phone or computer.

### **Enclosure**

14 gauge galvaneal steel with internal baffling and 1" foam or sound attenuation and weather protection.

### **Battery Charger**

A marine grade, 5 Amp charger is standard with the possibility to upgrade to a 10 Amp charger.

### **Group 24 650 CCA Battery**

Interstate BCI 24 650 CCA

# SPECIFICATIONS

## GENERATOR SET

OUTPUT	WATTS	KVA	AMPS	CB
				AMPS
120/240V 1-PH, 1.0 PF	62,000	62	258	250
120/208V 3-PH, 0.8 PF	62,000	77	215	225
120/240V 3-PH, 0.8 PF	62,000	77	186	175
277/480V 3-PH, 0.8 PF	62,000	77	93	100
SOUND DATA <sup>(1)</sup>				76
CERTIFICATION			UL2200 LISTED	

NOTE: (1) Measurement is in db(a). Tested at 7 meters (23ft) with housing.

## ALTERNATOR

RATING	(125/40°C) STANDBY
VOLTAGE REGULATION	+/- 1.5%
TOTAL HARMONIC DISTORTION	< 5%
TYPE	4 POLE REVOLVING FIELD
BRUSHLESS	YES
GENERATOR SPEED	1800 RPM
VOLTAGE CONTROL	SX460 EXTERNAL EXCITATION
ROTOR	2/3 PITCH
WINDINGS	100% COPPER
TELEPHONE INTERFERENCE	< 2.0%
EFFICIENCY PEAK	~ 92.5%
COUPLING	FLEXIBLE DISC
SINGLE PHASE	4 LEADS
3 PHASE	12 LEADS
BEARINGS	1 MAINTENANCE FREE
INSULATION	CLASS H
GENERATOR WARRANTY <sup>(1)</sup>	1 YR/1000 HRS

NOTES: (1) Standby only. Prime warranty 12 months/unlimited hrs. For more generator warranty information contact your local WINCO dealer.

## DERATING FACTORS

TEMPERATURE > 104°F	3% PER 10°F
ALTITUDE	3% EVERY 300M AFTER 1000M
MAX OPERATING TEMP	122°F/50°C

## BATTERY

DC SYSTEM VOLTAGE	12V
BATTERY CHARGER	5 AMP
BATTERY RACK/CABLE	INCLUDED
REQUIRED BATTERY <sup>(1)</sup>	GROUP 24 650 CCA

Notes: (1) Battery not included

## ENGINE

BRAND	FPT
MODEL	N45 SM2
SPEED	1800 RPM
EPA	TIER III
TYPE	DIESEL
GROSS HP (STANDBY)	94
BORE x STROKE	4.09" x 5.2"
GOVERNOR	MECHANICAL
CYLINDERS	4
TOTAL DISPLACEMENT	4.5 L
ASPIRATION	TURBOCHARGED
EXHAUST OUTLET <sup>(1)</sup>	3"
ALTERNATOR	90 AMPS
OIL & FILTER REPLACEMENT	600 HRS
RECOMMENDED OIL <sup>(2)</sup>	15W 40
OIL CAPACITY	13.5 QT
FLYWHEEL (TEETH 125)	11.5"
DISCHARGE CURRENT (EN 50342)	650 A
COLD STARTING	
W/O PREHEATING	5°F (-15°C)
W/ PREHEATING	-13°F (-25°C)
ENGINE WARRANTY <sup>(3)</sup>	5 YRS/2000 HRS

NOTES: (1) Muffler ships loose. (2) This oil is recommended for most applications. See Operator's Manual for more details on the appropriate oil type for your needs.

(3) Standby, for more engine warranty information contact your local FPT dealer.

## BLOCK HEATER

VOLTS	120
WATTS	1,000
THERMOSTAT	
ON	100°F
OFF	120°F

## FUEL

FUEL TYPE	DIESEL
FUEL CONSUMPTION	
100% LOAD	4.57 GAL/HR
50% LOAD	2.38 GAL/HR

## TANK OPTIONS

100 GALLON UL142	84" x 41" x 13"
210 GALLON UL142	84" x 41" x 25"
310 GALLON UL142	84" x 41" x 36"

# SPECIFICATIONS

## SHIPPING

DIMENSIONS OPEN	84" x 41" x 44.9"
NET WEIGHT OPEN	2,250 LBS
DIMENSIONS ENCLOSED	103" x 41" x 64"
NET WEIGHT ENCLOSED	3,425 LBS
FREIGHT CLASS	70

## DSE 7310 MKII CONTROLLER

ENGINE DISPLAY	
ENGINE RPM	YES
LOW OIL PRESSURE	YES
HIGH COOLANT TEMP	YES
LOW COOLANT	OPTIONAL
LOW OIL TEMP	OPTIONAL
OVER/UNDER SPEED	YES
OVER CRANK	YES
CHARGING ALT FAILURE	YES
CAN ECU SHUTDOWN	YES
GENSET DISPLAY	
VOLTAGE (L-N & L-L)	YES
OVER/UNDER VOLTAGE	YES
FREQUENCY	YES
OVER/UNDER FREQUENCY	YES
AMP DISPLAY/SHUTDOWN	YES
PHASE IMBALANCE	DISABLED
KW, KVA, KVAR, PF DISPLAY	YES
KWH, KVAH, KVARH, DISPLAY	YES
GENERATOR PHASE SEQUENCE	OPTIONAL
EARTH CURRENT	OPTIONAL


ADDITIONAL DISPLAYS/PROTECTIONS	
EMERGENCY STOP	YES
FUEL LEAK/SENDER FAILURE	YES
BATTERY OVER/UNDER VOLTAGE	YES
BATTERY CHARGER FAILURE	OPTIONAL
COMMUNICATIONS	
USB CONNECTABLE	YES
RS232/RS485	YES
NFPA ANNUNCIATOR	10XDSE 2548 OPTIONAL
REMOTE DISPLAY PANEL	3XDSE 2510 OPTIONAL
DSE850 WEBNET	OPTIONAL
ADDITIONAL FEATURES	
AUDIBLE ALARM	YES
ENGINE EXERCISER	YES
MAINTENANCE INTERVAL TIMER	OPTIONAL
LOAD SHEDDING/ DUMMY	OPTIONAL
CONFIGURABLE INPUTS	9-24 W/DSE 2130 OPTIONAL
CONFIGURABLE OUTPUTS	6-80 W/DSE 2751 OPTIONAL
EVENT LOG	YES
ALTERNATIVE CONFIGURATIONS	3
UL/CSA LISTED	YES




DSE 7310

# OUTLINE DRAWINGS

## OPEN SKID

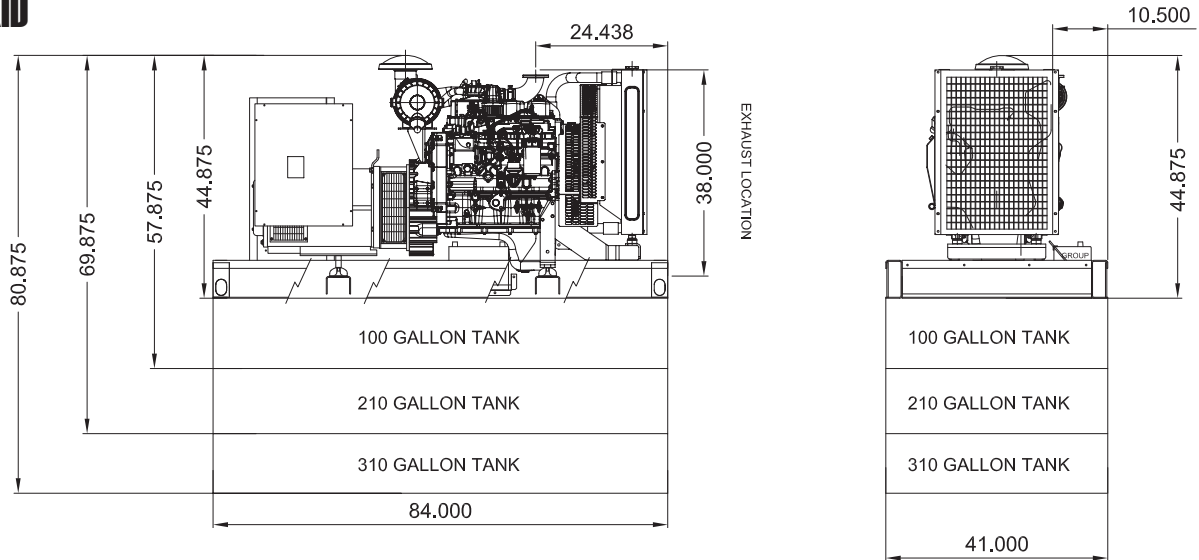

## ENCLOSED

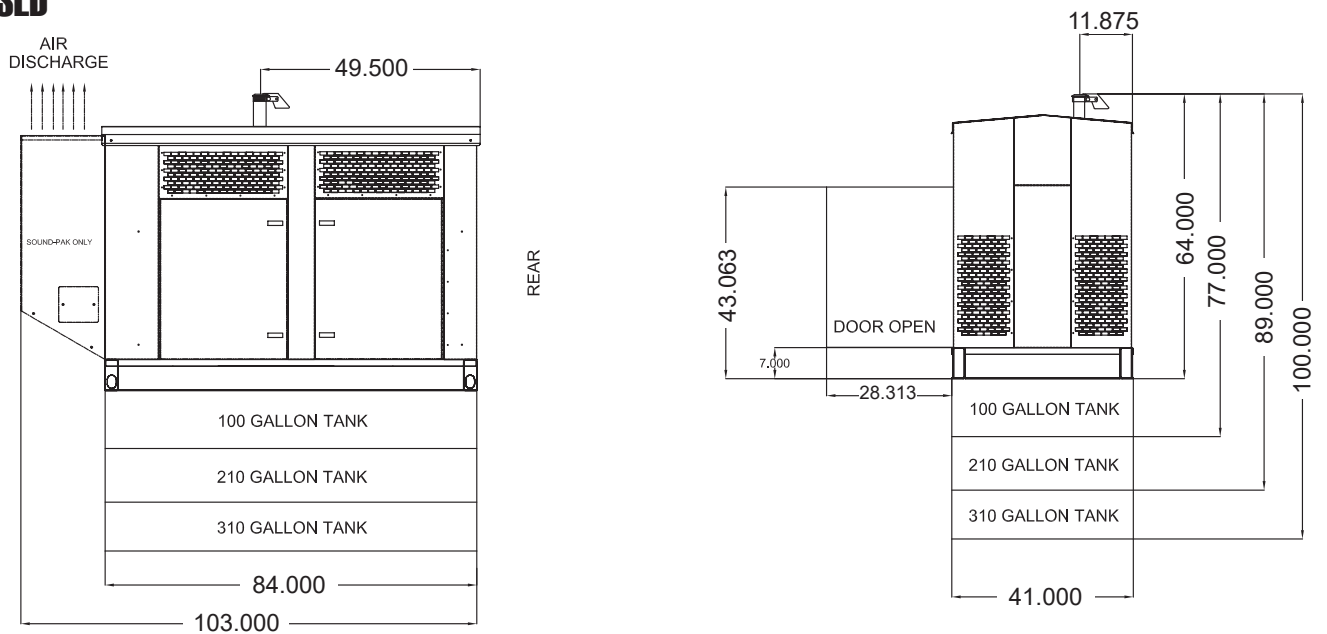

Specifications are subject to change without notice.